


CUSTOMER:TPL

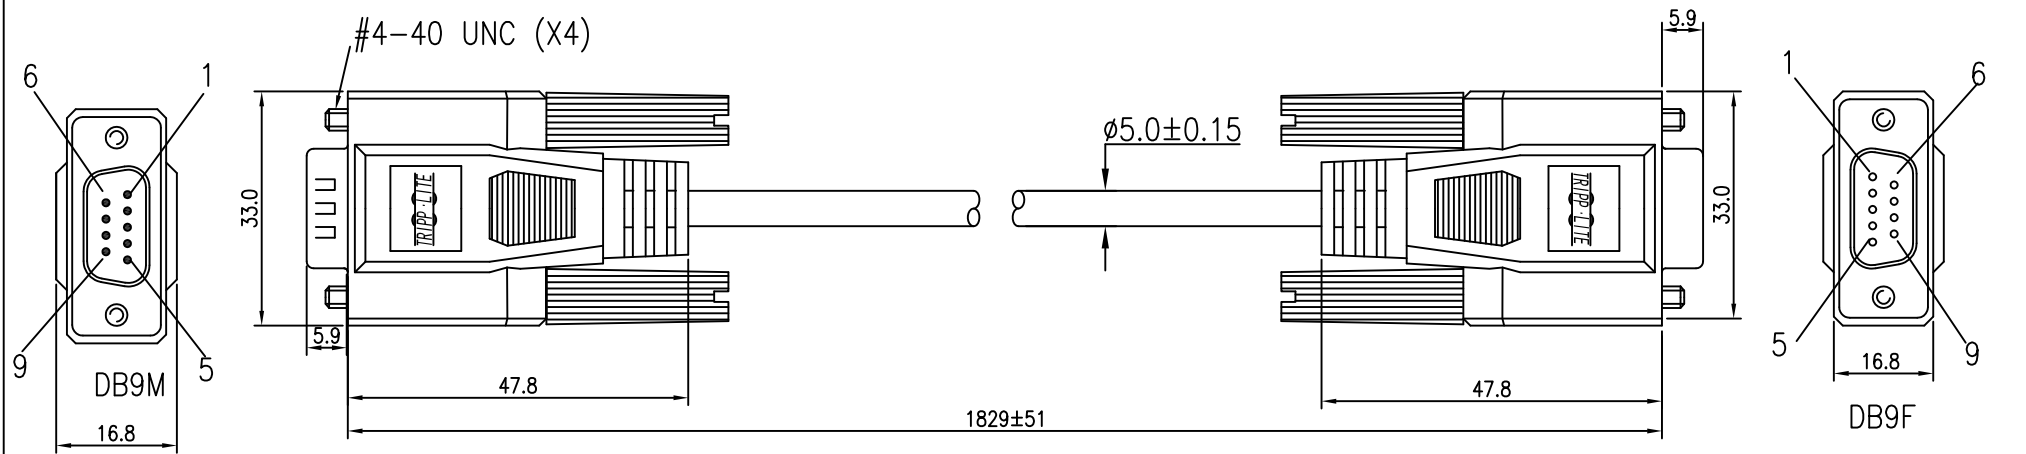

P1

PIN OUT P2

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
SHELL	SHELL(DRAIN WIRE)

APPROVED BY _____
 COMPANY: _____
 PURCHASING/ENGINEER: _____
 DATE: _____

- NOTE:
- CABLE: 28AWG X 9C, AL-FOIL SHIELDED WITH DRAIN WIRE, NON-UL, BEIGE PVC JACKET(TNT-BG-03) OD:5.0±0.15mm.
 - CONNECTOR:
 P1: D-SUB 9PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS;PBT BLACK INSULATION. GOLD PLATED SHELL.
 P2: D-SUB 9PIN FEMALE: SOLDER TYPE, GOLD FLASH CONTACTS.PBT BLACK INSULATION. GOLD PLATED SHELL.
 - THUMB SCREW TO BE MOLDED BEIGE(TNT-BG-02).
 - ALL HOOD: MOLDED BEIGE(TNT-BG-02) PVC.
 - PACKING: EACH CABLE IN A POLY-BAG.
 - MOLD NO:P1 AND P2:TNT-DB9-N01,TNT-DB9-01.

B	Increase the size of the joint	04/06/16								
A	INITIAL RELEASE	02/29/16								
REV	DESCRIPTION OF CHANGE	DATE								
<table border="1"> <thead> <tr> <th>TOLERANCE INCHES</th> <th>M/M</th> </tr> </thead> <tbody> <tr> <td>.X</td> <td>.015</td> </tr> <tr> <td>.XX</td> <td>.010</td> </tr> <tr> <td>.XXX</td> <td>.005</td> </tr> </tbody> </table>		TOLERANCE INCHES	M/M	.X	.015	.XX	.010	.XXX	.005	
TOLERANCE INCHES	M/M									
.X	.015									
.XX	.010									
.XXX	.005									
SCALE	NONE	REV B								
UNIT	MM									
DRAWN BY	ZHANG	SHEET 1/1 DATE 04/06/16 DWG NO.								
CHECK BY		TITLE DB9M TO DB9F								
APPD BY		PART NO. P520-006								

