

MODELS:

PDU3VN3L2130, PDU3VN6L2130, PDU3VN10L2130

3-Phase Monitored Rack-Mount PDU



208V
3-Phase Input



NEMA L21-30P
Plug



208/120V
Single-Phase
Output



45 Total Outlets



8.6kW
Load
Capacity



Multimode
Load Meter



0U
Rack Mount









Toolless
Mounting
Buttons

- A** Digital Load Meter
- B** C13, C19 and 5-15/20R Outlets
- C** 20A Circuit Breakers (x3, One per Load Bank)
- D** Plug-Lock Cable Retention Inserts
- E** Removable Mounting Brackets
- F** Toolless Mounting Buttons with Removable 90° Rotation Brackets
- G** PDU3VN3L2130: 3 ft. Input Power Cord
PDU3VN6L2130: 6 ft. Input Power Cord
PDU3VN10L2130: 10 ft. Input Power Cord
- H** NEMA L21-30P Input Plug
- I** Durable Metal Housing
- J** Network Interface
- K** RJ45 Ethernet Jack
- L** Manual Configuration Port
- M** Environmental Monitoring Port
- N** Network Interface Reset Button

Also Includes:
Owner's Manual

Multimode Load Meter: Display the load for any phase or bank, display temperature or humidity (requires optional EnviroSense sensor), display the IP address and rotate the display 180°.

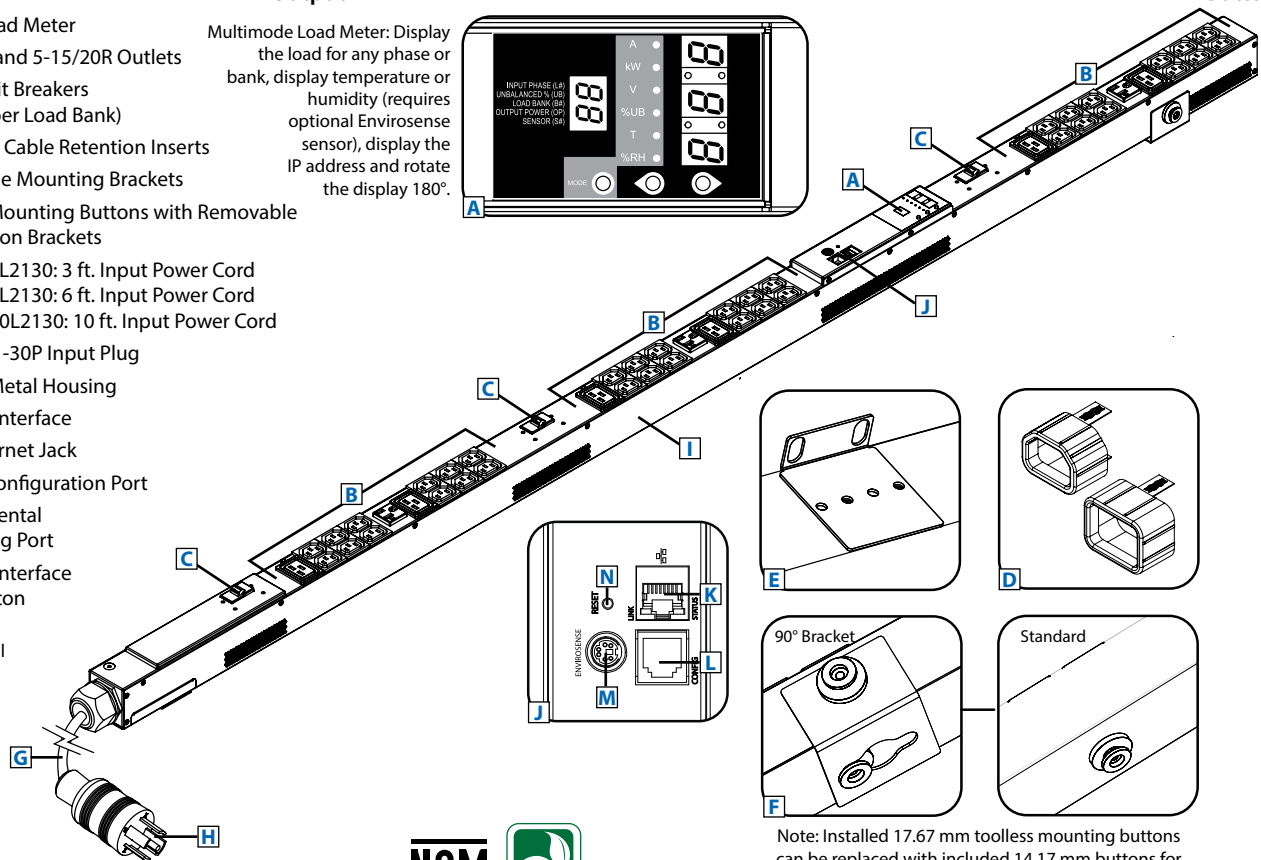

Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.

Specifications

Models	PDU3VN3L2130, PDU3VN6L2130, PDU3VN10L2130
Voltage	208/120V (3-Phase Input/Single-Phase Output)
Frequency	50/60 Hz
Load Capacity	8.6kW
Input Plug	NEMA L21-30P
Input Cord Length	PDU3VN3L2130: 3 ft., PDU3VN6L2130: 6 ft., PDU3VN10L2130: 10 ft.
Outlets	45 (36 C13 / 6 C19 / 3 5-15/20R)
Primary Mounting Option	0U (Vertical) Rack Mount
Shipping Weight	PDU3VN3L2130: 23 lb. PDU3VN6L2130: 23 lb. PDU3VN10L2130: 21 lb.
Unit Weight & Dimensions	PDU3VN3L2130: 13.5 lb. / 70 x 2.17 x 2.52 in. PDU3VN6L2130: 13.5 lb. / 70 x 2.17 x 2.52 in. PDU3VN10L2130: 13.5 lb. / 70 x 2.17 x 2.52 in. <i>See next page for detailed unit measurements.</i>
Certifications	Tested to UL/CAN 60950-1 (US & Canada), NOM (Mexico), FCC Class A, RoHS, TAA Compliant

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.








- Distributes power to 45 outlets (36 C13, 6 C19 and 3 5-15/20R)
- Remote monitoring and control via SNMP, Web or telnet
- Displays load for any output phase in real time
- Perfect for rack-mount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

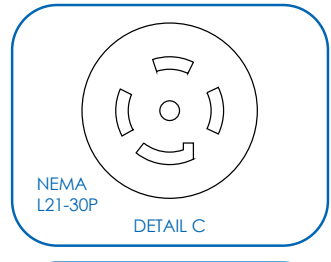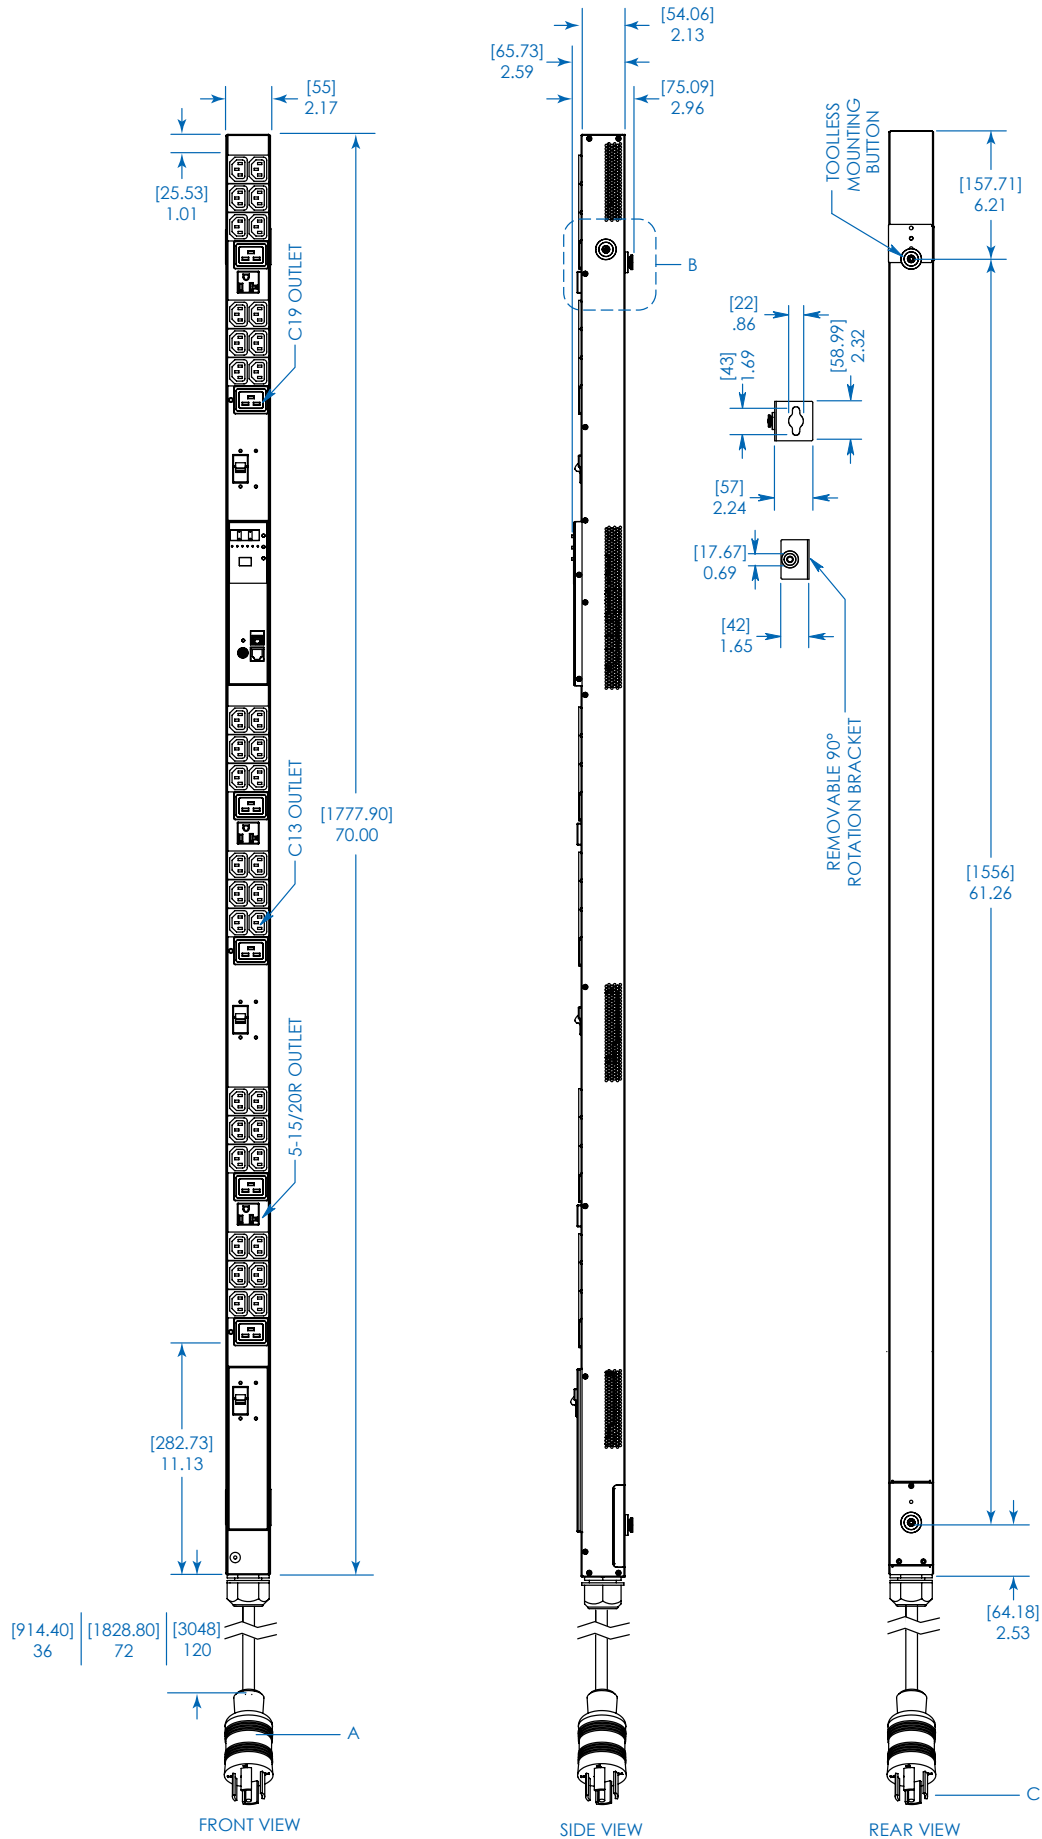

MODELS:
PDU3VN3L2130,
PDU3VN6L2130,
PDU3VN10L2130



1111 W. 35th Street
 Chicago, IL 60609 USA
 773.869.1234

www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.