

Passive module - UM-FLK14/SI/LA/PTS/8IM/PLC - 2306993


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, for 8 channels with additional plus and minus terminal blocks. Each channel is secured with a fuse (5 x 20 mm) and comes with a fuse failure indicator. The signal path can be interrupted with a disconnect knife.



Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 STK |
| GTIN |  4 017918 976743 |
| GTIN | 4017918976743 |

Technical data

Dimensions

| | |
|--------|----------|
| Width | 55 mm |
| Height | 125.5 mm |
| Depth | 72.5 mm |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

General

| | |
|--|---------------------------|
| Max. perm. operating voltage | 24 V DC |
| Max. perm. current (per branch) | 1 A |
| Max. permissible current (separate power supply) | 4 A |
| Number of positions | 14 |
| Status display | No |
| Mounting position | any |
| Assembly instructions | In rows with zero spacing |

Connection data for connection 1

| | |
|-----------------|-------------|
| Connection name | Field level |
|-----------------|-------------|

Passive module - UM-FLK14/SI/LA/PTS/8IM/PLC - 2306993

Technical data

Connection data for connection 1

| | |
|----------------------------------|--|
| Connection method | Screw connection |
| Stripping length | 6 mm |
| Screw thread | M3 |
| Conductor cross section solid | 0.14 mm ² ... 1.5 mm ² |
| Conductor cross section flexible | 0.14 mm ² ... 1.5 mm ² |
| Conductor cross section AWG | 26 ... 16 |

Standards and Regulations


| | |
|-----------------------|---------------------------|
| Standards/regulations | DIN EN 50178 |
| Rated surge voltage | 0.4 kV (basic insulation) |
| Degree of pollution | 2 |
| Overvoltage category | I |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Circuit diagram

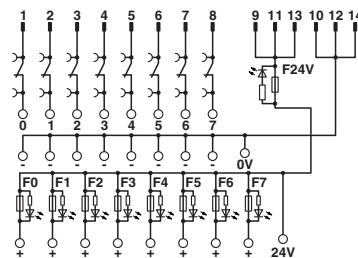

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
 Flachsmarktstr. 8
 32825 Blomberg
 Germany
 Tel. +49 5235 300
 Fax +49 5235 3 41200
<http://www.phoenixcontact.com>