

STRADA-2X2-DNW

Soft wide beam with good illuminance uniformity


TECHNICAL SPECIFICATIONS:

Dimensions	50.0 mm
Height	11.3 mm
Fastening	glue, pin, screw
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	8.2 kg
Quantity in Box	800 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
STRADA-2X2-DNW	Lens array	PMMA	clear

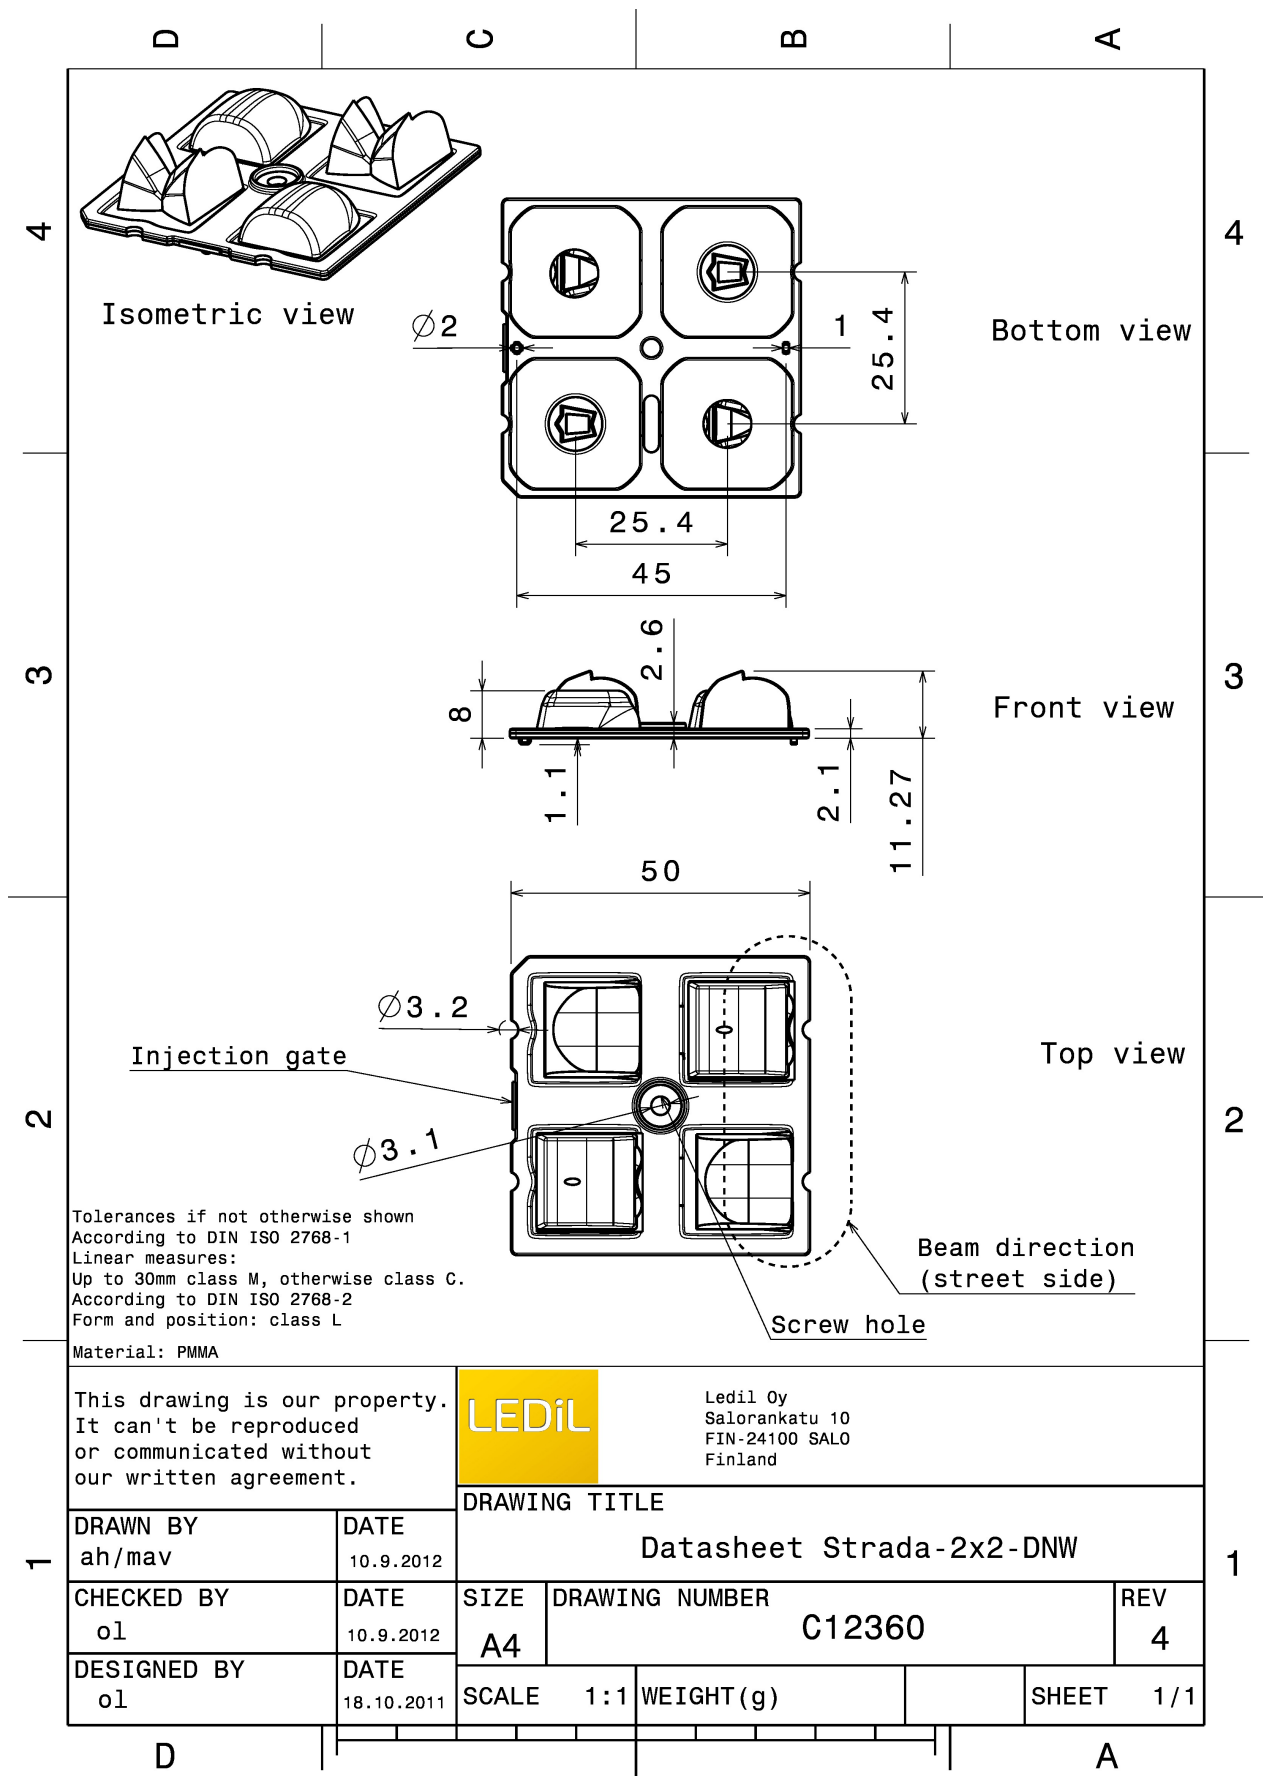


This drawing is our property. It can't be reproduced or communicated without our written agreement.		LEDiL		LediL Oy Salorankatu 10 FIN-24100 SALO Finland	
DRAWING TITLE		Datasheet Strada-2x2-DNW			
DRAWN BY ah/mav	DATE 10.9.2012	SIZE A4		DRAWING NUMBER C12360	REV 4
CHECKED BY ol	DATE 10.9.2012	SCALE 1:1	WEIGHT (g)	SHEET 1/1	
DESIGNED BY ol	DATE 18.10.2011				


PHOTOMETRIC DATA (MEASURED):




LED QUICK FLUX XTP 2x4 xxx LS G5
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.600 cd/lm
Required components:

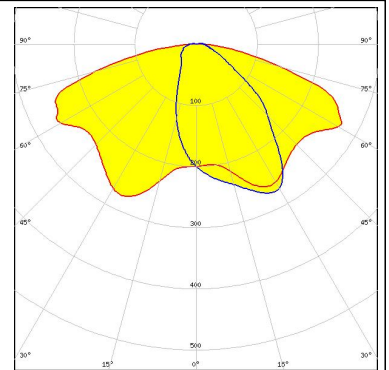


LED QUICK FLUX XTP 2x6 xxx LS G5
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.580 cd/lm
Required components:

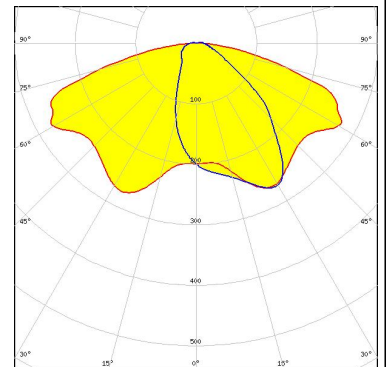

LED XM-L
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.270 cd/lm
Required components:

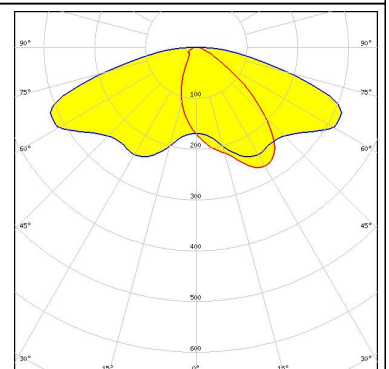


LED XM-L2
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.500 cd/lm
Required components:

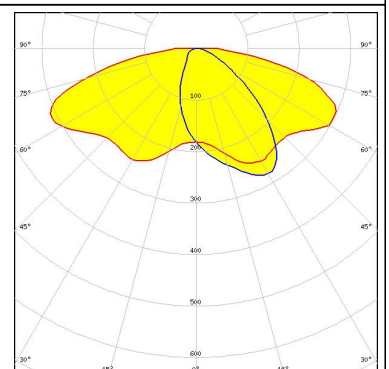


PHOTOMETRIC DATA (MEASURED):




LED XP-G
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.440 cd/lm
 Required components:

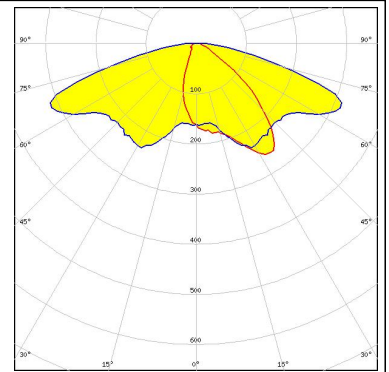


LED XP-G2
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.600 cd/lm
 Required components:

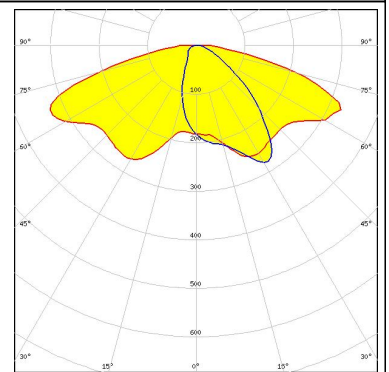

LED XP-L
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.470 cd/lm
 Required components:

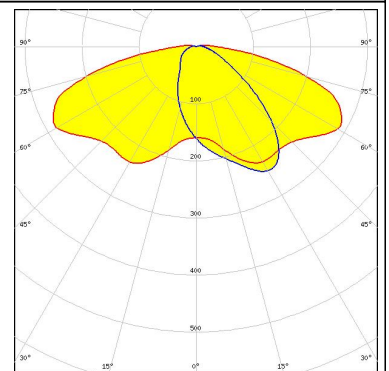


LED XP-L HI
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.570 cd/lm
 Required components:

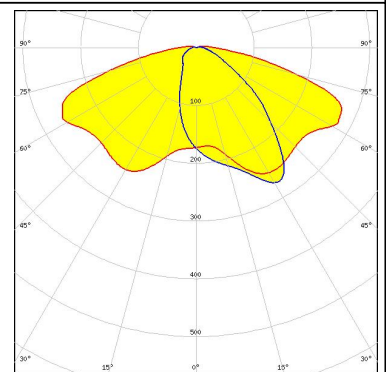


PHOTOMETRIC DATA (MEASURED):




LED XP-L2
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.420 cd/lm
 Required components:

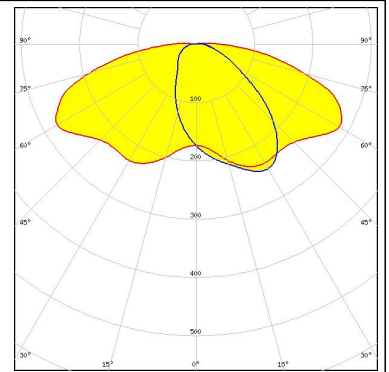


LED XT-E
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.290 cd/lm
 Required components:

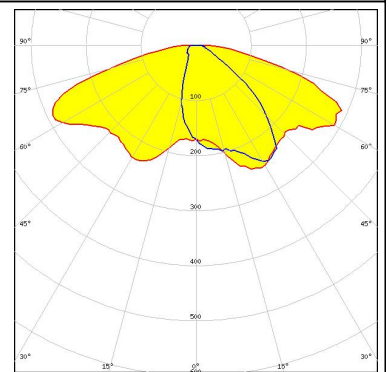

LED XT-E HVW
 FWHM Asymmetric
 Efficiency %
 Peak intensity cd/lm
 Required components:

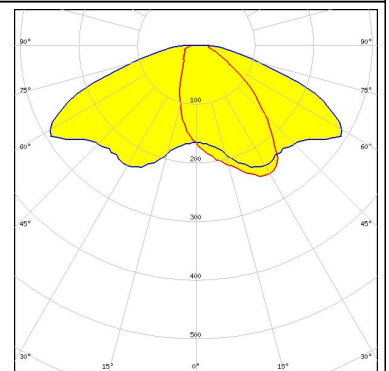


LED H35C0 (LEMWA33)
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.560 cd/lm
 Required components:

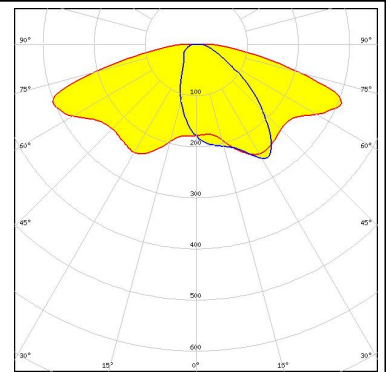

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED LUXEON MZ
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.440 cd/lm
Required components:

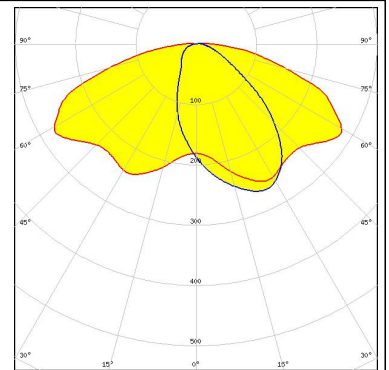


LUMILEDS

LED LUXEON Q
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.600 cd/lm
Required components:

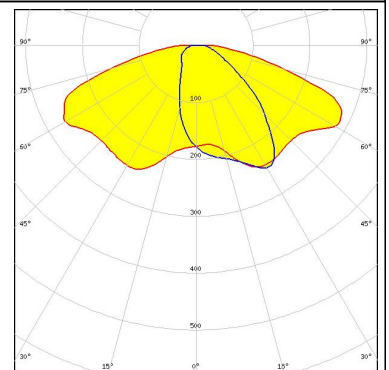


LUMILEDS

LED LUXEON Rebel ES
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.340 cd/lm
Required components:

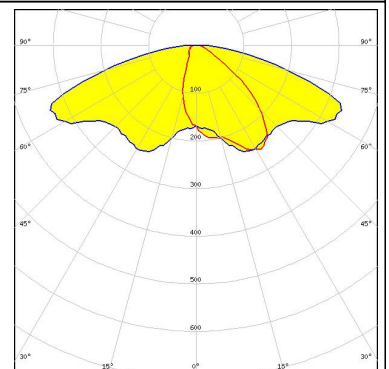

LUMILEDS


LED LUXEON T
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.600 cd/lm
Required components:

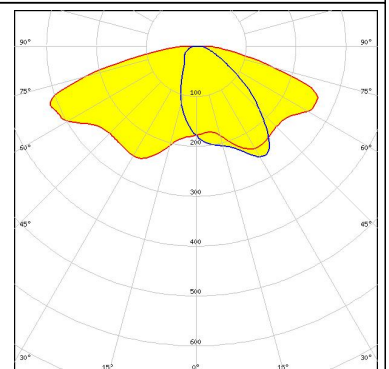

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED LUXEON TX
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.600 cd/lm
 Required components:

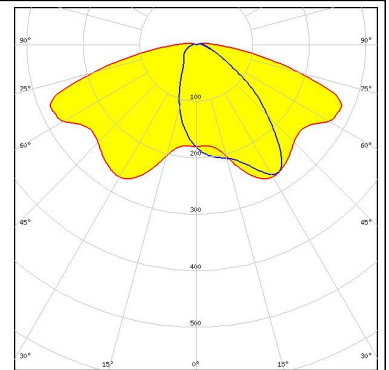


LUMILEDS

LED LUXEON Z ES
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.620 cd/lm
 Required components:

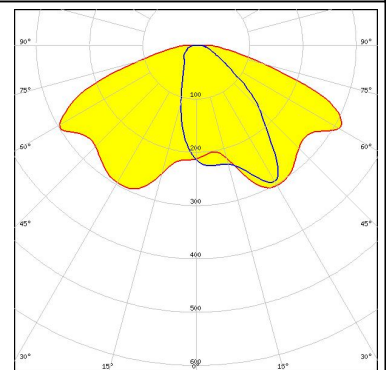


NICHIA

LED NVSW3x9A
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.510 cd/lm
 Required components:

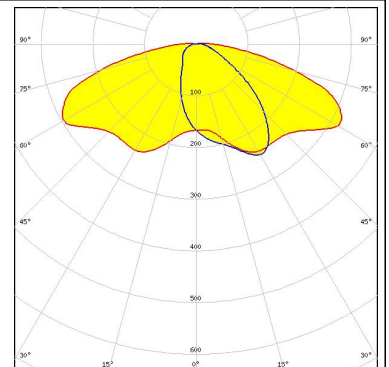

NICHIA



LED NVSxE21A
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.310 cd/lm
 Required components:

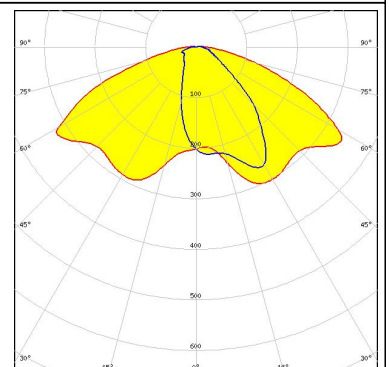

PHOTOMETRIC DATA (MEASURED):



OSRAM

LED PrevaLED Brick DC 2x8
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.580 cd/lm
 Required components:

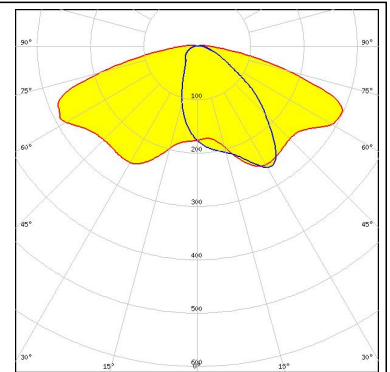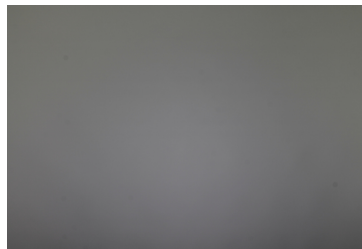


OSRAM
Opto Semiconductors

LED Oslon Square Gen3
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.580 cd/lm
 Required components:

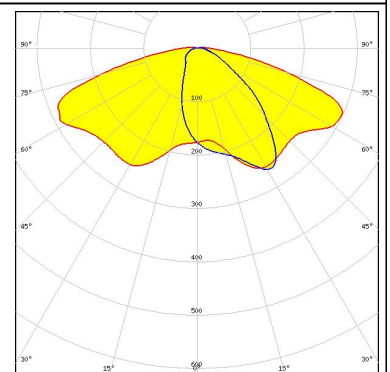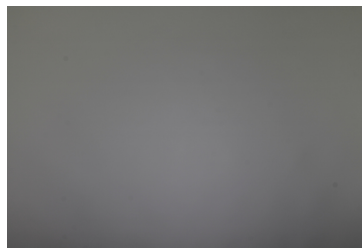


OSRAM
Opto Semiconductors

LED Oslon Square PC
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.500 cd/lm
 Required components:

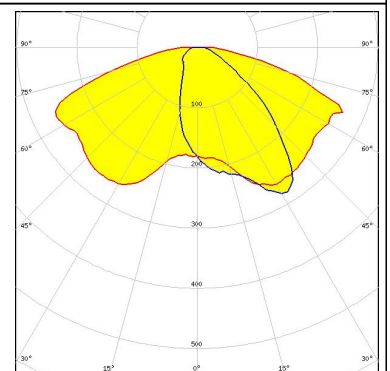

PHILIPS


LED Fortimo FastFlex LED board 2x8 DA G4
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.650 cd/lm
 Required components:

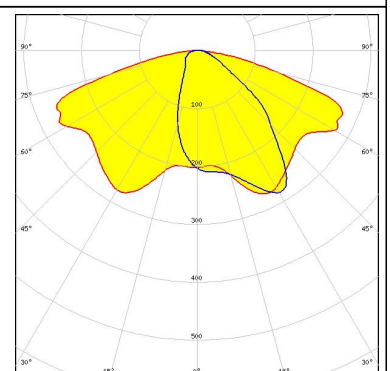

PHOTOMETRIC DATA (MEASURED):


PHILIPS

LED Fortimo FastFlex LED board 2x8 DAX G4
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.000 cd/lm
Required components:

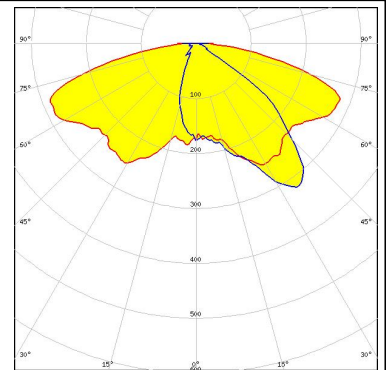


SAMSUNG

LED LH351B
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.550 cd/lm
Required components:

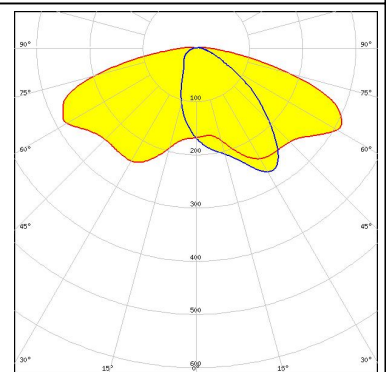


SAMSUNG

LED LH351D
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.450 cd/lm
Required components:

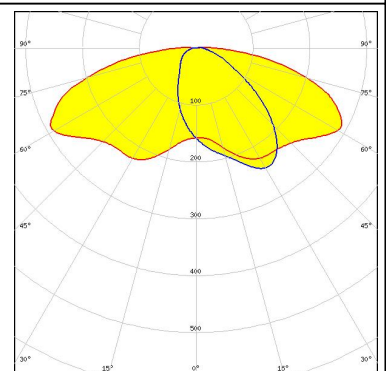
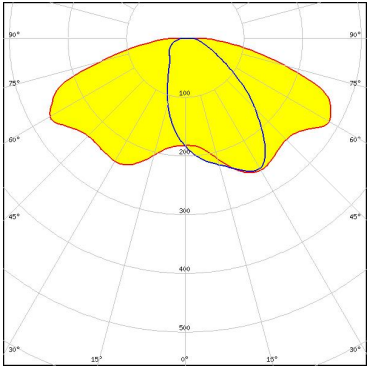




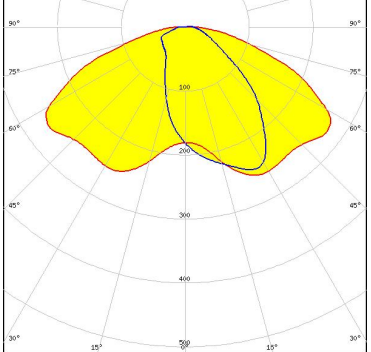


SAMSUNG

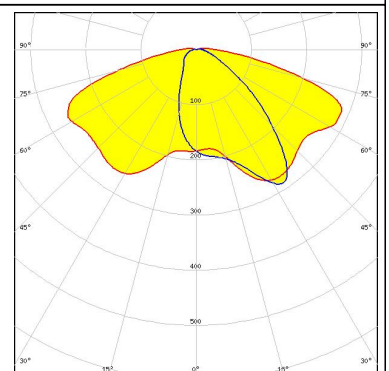LED LH351Z
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.610 cd/lm
Required components:



PHOTOMETRIC DATA (MEASURED):
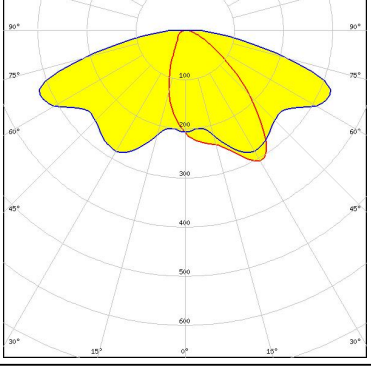
<p> SEOUL SEMICONDUCTOR</p> <p>LED Acrich MJT 4040 FWHM Asymmetric Efficiency 94 % Peak intensity 0.480 cd/lm Required components:</p>	
<p> SEOUL SEMICONDUCTOR</p> <p>LED Z5 FWHM Asymmetric Efficiency 93 % Peak intensity cd/lm Required components:</p>	
<p> SEOUL SEMICONDUCTOR</p> <p>LED Z5M1/Z5M2 FWHM Asymmetric Efficiency 94 % Peak intensity 0.700 cd/lm Required components:</p>	
<p> SEOUL SEMICONDUCTOR</p> <p>LED Z8Y22 FWHM Asymmetric Efficiency 94 % Peak intensity 0.450 cd/lm Required components:</p>	


PHOTOMETRIC DATA (MEASURED):

<p>SEUL SEOUL SEMICONDUCTOR</p> <p>LED Z8Y22P FWHM Asymmetric Efficiency 94 % Peak intensity 0.490 cd/lm Required components:</p>	
<p>TOSHIBA Leading Innovation >>></p> <p>LED TL1L3 FWHM Asymmetric Efficiency 94 % Peak intensity 0.430 cd/lm Required components:</p>	
<p>TOSHIBA Leading Innovation >>></p> <p>LED TL1L4 FWHM Asymmetric Efficiency 94 % Peak intensity 0.520 cd/lm Required components:</p>	
<p>TRIDONIC</p> <p>LED RLE G1 49x121mm 2000lm xxx EXC OTD FWHM Asymmetric Efficiency 94 % Peak intensity 0.980 cd/lm Required components:</p>	

PHOTOMETRIC DATA (MEASURED):


TRIDONIC

LED RLE G1 49x133mm 2000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.980 cd/lm
Required components:

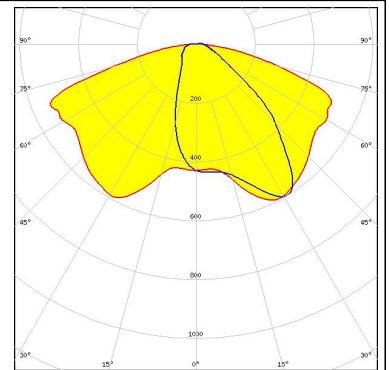


TRIDONIC

LED RLE G1 49x223mm 4000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.980 cd/lm
Required components:

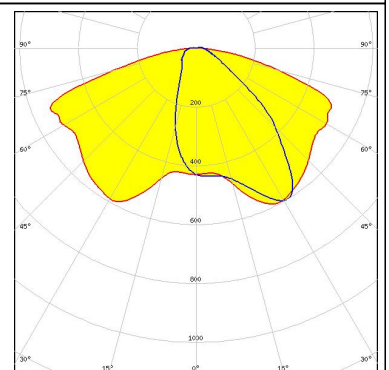


TRIDONIC

LED RLE G1 49x245mm 4000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.980 cd/lm
Required components:

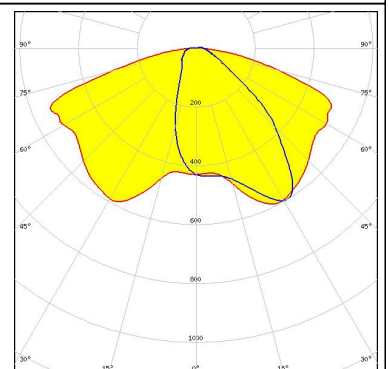

TRIDONIC


LED RLE G2 HP 2x8 4000lm
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.700 cd/lm
Required components:

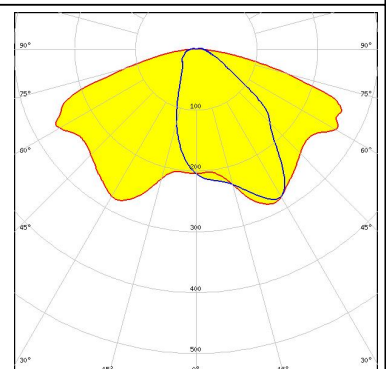


PHOTOMETRIC DATA (SIMULATED):




LED XP-G3
FWHM Asymmetric
Efficiency 87 %
Peak intensity 0.590 cd/lm
Required components:

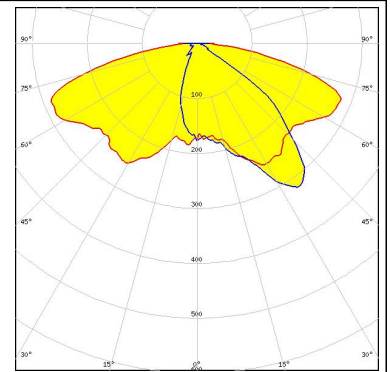


LED XQ-E
FWHM Asymmetric
Efficiency 93 %
Peak intensity cd/lm
Required components:

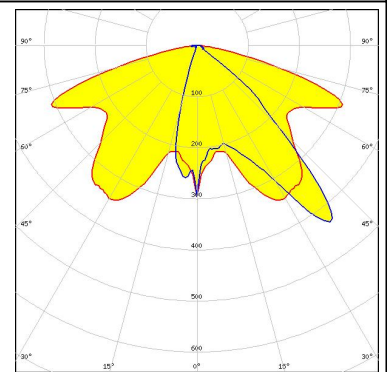

LED LUXEON H50-2
FWHM Asymmetric
Efficiency %
Peak intensity cd/lm
Required components:

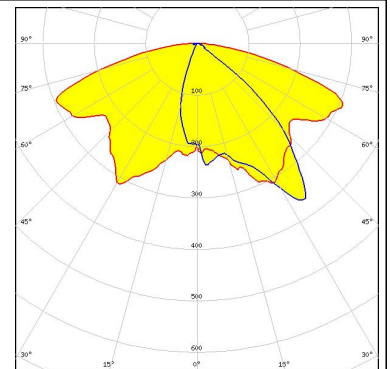

LED NVSxx19B/NVSxx19C
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.621 cd/lm
Required components:

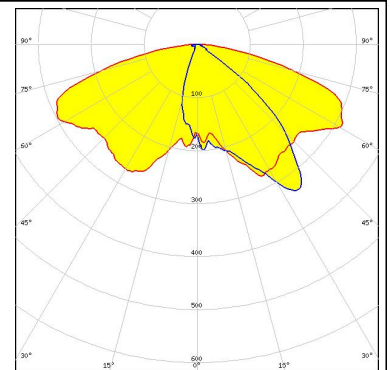


PHOTOMETRIC DATA (SIMULATED):

OSRAM
Opto Semiconductors

LED Duris S8
FWHM Asymmetric
Efficiency 92 %
Peak intensity 0.400 cd/lm
Required components:


OSRAM
Opto Semiconductors

LED OSCONIQ P 3737 (2W version)
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.690 cd/lm
Required components:

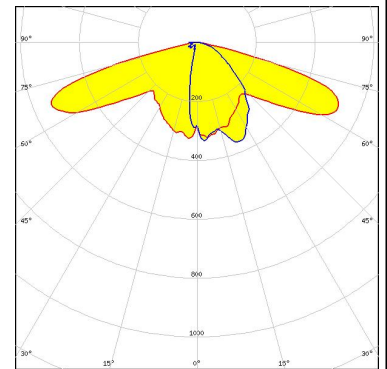

OSRAM
Opto Semiconductors

LED OSCONIQ P 3737 (3W version)
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.510 cd/lm
Required components:

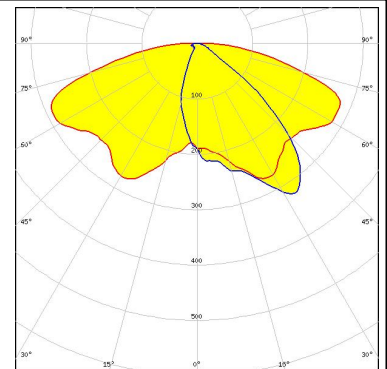

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)